



**NIPPON
PAINT**




JIKIART

Royal Stone

Textured Coating

• Premium • Stylish • Bold

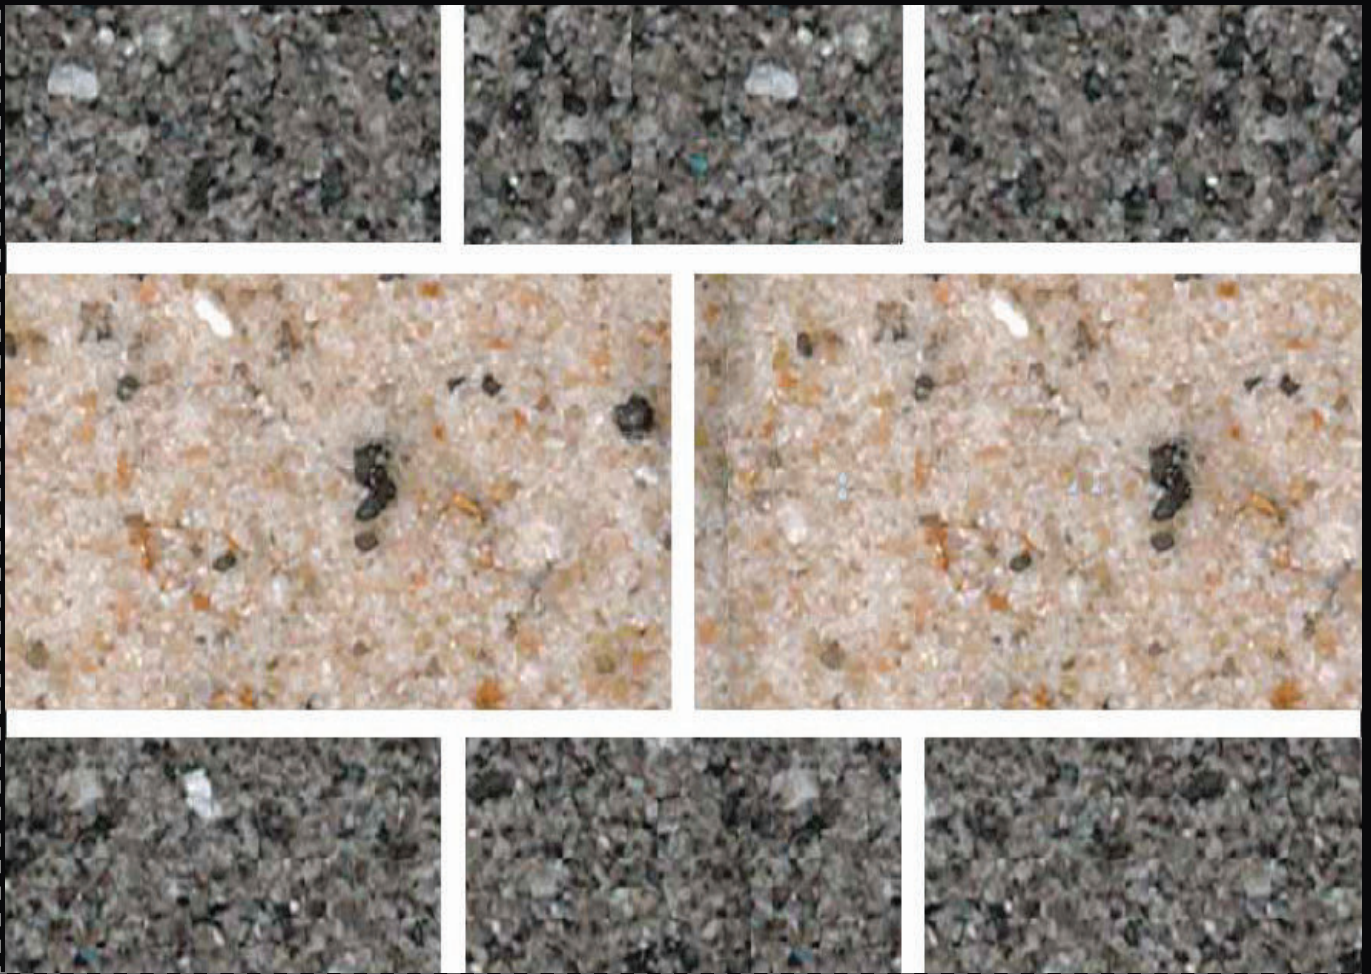

Groove Colours




White



Light Grey



Medium Grey



Black



RS-301



RS-322



RS-323



RS-325



RS-331



RS-332



RS-333




RS-334



RS-335



RS-336

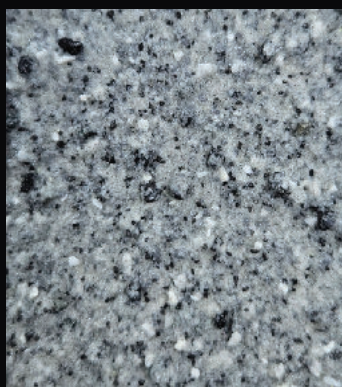


RS-337



RS-338

Note: The colour shades displayed are indicative and not precise representations of our actual paint colours. Please refer to the actual chip for a more accurate shade.

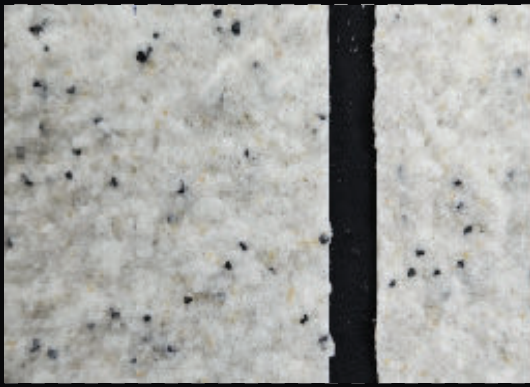


RS-201/204



RS-201/202



RS-205/201

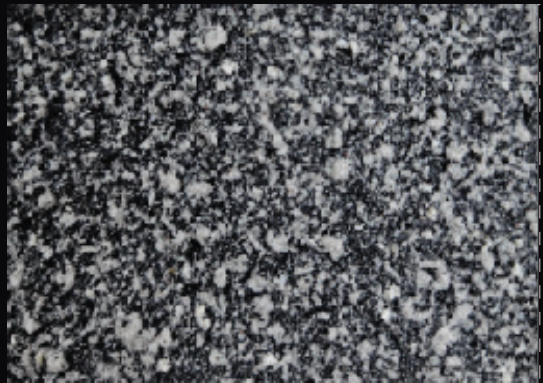

RS-206/207



RS-208/202



RS-209/202



RS-210/203



RS-211/203

JKIART

Royal Stone

Premium grade selection of granite-stone textured coatings that can withstand UV and is weather resistant. JKIART Royal Stone hides wall imperfections and gives a natural granite-stone finish to both external and internal masonry surfaces.

Product Features



Excellent durability



Colour retention



High abrasion and scratch resistance




Environmental friendly product



Light weight coating



Mask dirt streak marks



Near zero VOC



Application System

Single Colour

Type	Product	No. of Coats	Application Method	Theoretical Coverage
Sealer	Vinilex 2000 Water-Based Wall Sealer	1	Roller/Spray	12-14m ² /L
Undercoat	Jiki Under	1	Roller/Spray	2-2.5m ² /kg
Texture	JikiArt Royal Stone	2	Spray	0.4-0.7m ² /kg/coat
Clear Coat	Clear Coat Si	2	Roller	7-9m ² /L

Double Colour

Type	Product	No. of Coats	Application Method	Theoretical Coverage
Sealer	Vinilex 2000 Water-Based Wall Sealer	1	Roller/Spray	12-14m ² /L
Undercoat	Jiki Under	1	Roller/Spray	2-2.5m ² /kg
Texture	JikiArt Royal Stone	2-3	Spray	0.4-0.7m ² /kg/coat
Clear Coat	Clear Coat Si	2	Roller	7-9m ² /L

Application Note:

- In case of recoating, cracks and unevenness substrate shall be repaired beforehand with acrylic putty/filler. Surface should be clean dry and stable before application.
- Appearance of base coat and texture coat may vary due to temperature, dilution ratio, air pressure or coating volume.

Disclaimer:

The information in this data sheet is given to the best of Nippon Paint's knowledge and practical experience. Users may consult with Nippon Paint on the general suitability of the product for their needs and specific application practices though it remains each user's responsibility to determine the suitability of the product for the user's particular use. The condition of the substrate and applications are not terms will apply to the product. Nippon Paint does not and cannot warrant the results which the user may obtain by using the product. In no event will Nippon Paint be liable to the user for any kind of loss (whether direct or indirect) even if Nippon Paint was previously advised of it. In line with Nippon Paint's policy for continuous development, Nippon Paint reserves the right to modify the product and the information in this data sheet without prior notice. It is the user's responsibility to check with Nippon Paint for the latest version of this data sheet. This data sheet has been translated into various languages. In the event of any inconsistency, the English version shall prevail.

NIPPON PAINT (SINGAPORE) CO PTE LTD

1 First Lok Yang Road Jurong Singapore 629728

www.nipponpaint.com.sg

+65 6265 5355